

'Push-Button' coil squib connector

Ø11mm VDA-AK2 interface, right angled, one step mating

Part-No.: CA284A XXXX XXXX

Mating design:

- CPA (connector positioning assurance)
- one step mating
- kojiri safe

Terminal system:

- O-type contact system
- one piece design
- selective gold plated
- two contact points

Termination technology:

- welding for coil termination
- welding for wire termination

General:

- supplied with different cable lengths
- single wire
- twisted wire
- jacketed cable



VW PN:4F0 972 562;4F0 972 562 A;4F0 972 562 B


Construction:

- housing material: PBT
- contact material: CuSn
- accepted wire range: 0,35 - 0,8mm²
- RFI/EMI protection: coil stock

Performance characteristics:

- pull out force: > 160N
- insertion force: < 40N
- temperature range: -40°C to +90°C
- dielectric resistance: 1000V / DC

Dimensional characteristics:

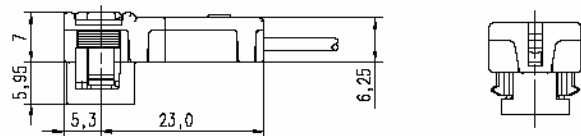

Connector interface:

- Ø11mm VDA-AK2
- code 1 (black)
- 2 (light green)
- 3 (yellow)

